


FEATURES

- Extremely low loss, internal resistance, and inductance.
- Stable operation with a lifespan of 100000 hours and unchanged sound quality.
- The outer sealing material has a shielding effect.
- Application: Bravery amplifier, Home audio, car audio, stage audio and other audio equipment.

STRUCTURE

- Imported 6N copper foil inner core.
- High tin content tin zinc alloy welding layer.
- PET metal coating, flame retardant epoxy resin encapsulation.
- Silver plated copper wire.

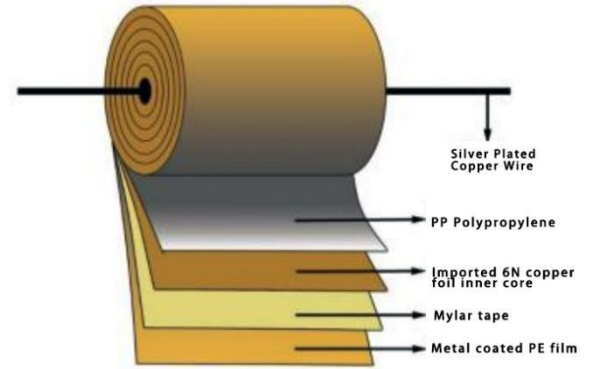


TECHNOLOGY

- German high-temperature industrial oil impregnation technology.
- High temperature vacuum heat treatment technology.
- Independently develops the "13 layer" gold spraying technology.



DRAWING (mm)

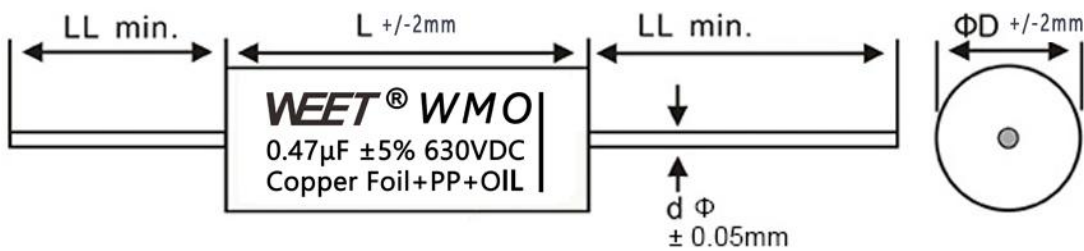

*Note: Short lead for input, longer lead for output.

PICTURE



SPECIFICATIONS

Items	Characteristics	Characteristics	Characteristics
Rated Voltage	630VDC	400VDC	250VDC
Capacitance Range	0.022 μ F~0.47 μ F	0.1 μ F~3.3 μ F	4.7 μ F~5.6 μ F
Capacitance Tolerance	\pm 5% (J)	\pm 5% (J)	\pm 5% (J)
Voltage Proof	630VDC	400VDC	250VDC
Dissipation Factor	See size table	See size table	See size table

SIZE TABLE (mm)

(Unit: μ F)	($\times 10^{-4}$)	OD	L	d	Lead Length
Capacitance	Dissipation Factor	± 2 mm	± 2 mm	± 0.05 mm	± 0.05 mm
630VDC					
0.022	3	15	21	1.0	40/50
0.033	3	17	21	1.0	40/50
0.047	3	23	21	1.0	40/50
0.068	3	23	21	1.0	40/50
0.1	3	24	21	1.0	40/50
0.22	3	22	36	1.0	40/50
0.33	3	20	57	1.0	40/50
0.47	3	23	57	1.0	40/50
400VDC					
0.1	3	20	21	1.0	40/50
0.22	3	23	26	1.0	40/50
0.33	3	24	36	1.0	40/50
0.47	3	25	41	1.0	40/50
1.0	5	30	58	1.0	60/70
1.2	5	33	58	1.0	60/70
1.5	5	37	58	1.0	60/70
1.8	5	41	58	1.0	60/70
2.0	5	42	58	1.0	60/70
2.2	5	44	58	1.0	60/70
2.5	5	40	58	1.0	60/70
2.7	5	43	58	1.0	60/70
3.0	5	46	58	1.0	60/70
3.3	5	46	58	1.0	60/70
250VDC					
4.7	5	40	57	1.0	60/70
5.6	5	44	57	1.0	60/70

Note: Other Values are available on request. WEET is capable of doing custom service for you.



WEET Technology Company Limited
ROOM 1405, 14/F, LUCKY CENTRE,
171 WANCHAI ROAD,
WANCHAI, HONG KONG
www.musicaps.com
sales@musicaps.com

All details in this data sheet are subject to change without notice.
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.







Raw Material: Layer of pure copper foil



Raw Material: Layer of PP Polypropylene film

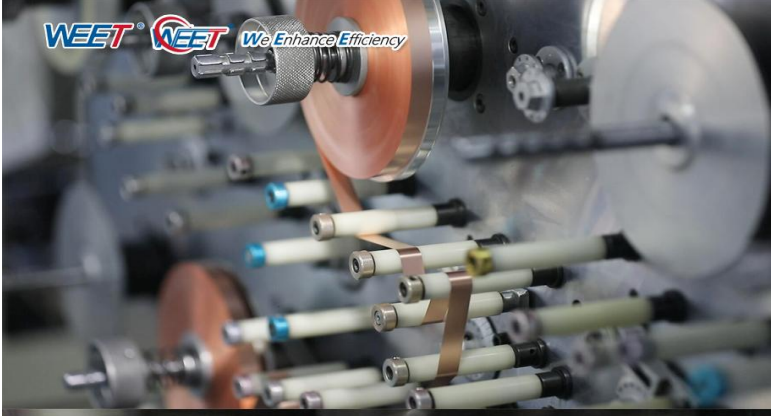

Copper foil spliced to polypropylene insulation film

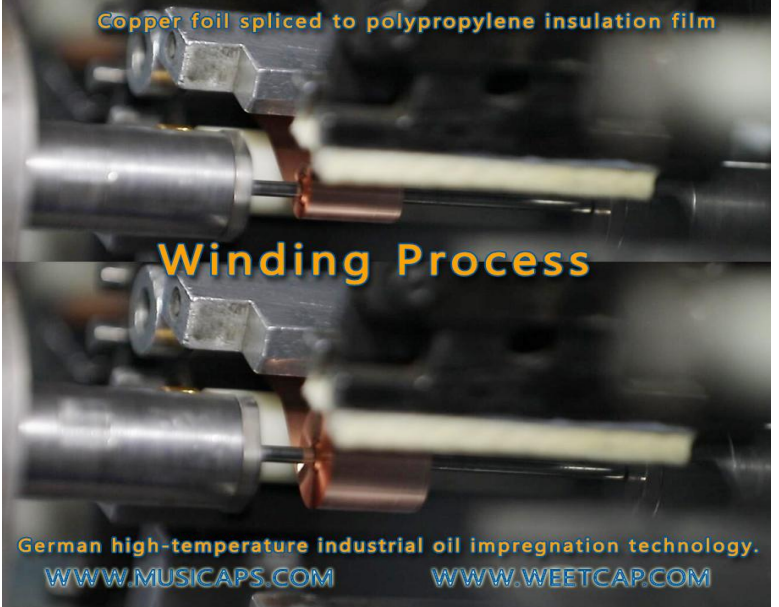

Winding Process

German high-temperature industrial oil impregnation technology.
WWW.MUSICAPS.COM WWW.WEETCAP.COM

WWW.MUSICAPS.COM

WWW.WEETCAP.COM



WEET WMO Oil Immersed Pure Copper Foil and PP Polypropylene Film Capacitors
Cross Jensen Copper Oil MIFLEX-KPCU



Imported 6N copper foil inner core. Silver plated copper wire.



German high-temperature industrial oil impregnation technology.

WWW.MUSICAPS.COM



Flame retardant epoxy resin encapsulation.



PET metal coating

German high-temperature industrial oil impregnation technology.

WWW.MUSICAPS.COM

WWW.WEETCAP.COM