


**FEATURES**

- WMR is constructed with a good quality aluminum and zinc based metalized polypropylene foil as medium and electrode, wrapped and sealed with flame-retardant plastic and epoxy resin. With high reliability, high temperature-resistance, small volume, large capacity and good self-healing property.
- A great multipurpose entry-level audiophile capacitor
- Virtually free of distortion and delivers a pleasant and rather neutral sonic profile.

**DRAWING (mm)**

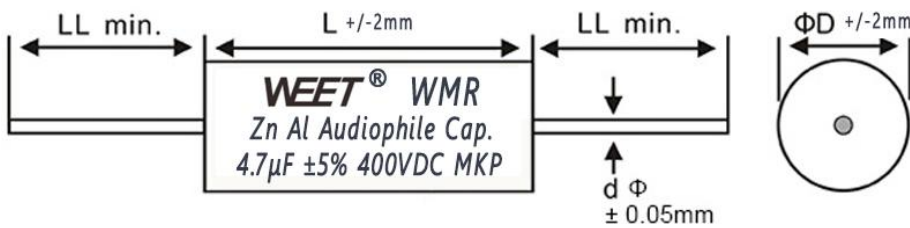

**PICTURE**



**SPECIFICATIONS**

Operating Temperature: -40°C ~ +85°C  
 Rated Voltage : 400V.DC  
 Withstand Voltage : 1.6UR 2s (1.5UR 5s)  
 Capacitance Range : 0.1µF ~ 300µF  
 Capacitance Tolerance : ±5%  
 Insulation Resistance : C≤0.33µF VR≤100V(10V)≥7500MΩ  
 VR>100V ≥15000 MΩ  
 C>0.33µF VR≤100V(10V)≥2500S VR>100V  
 ≥5000S

Dissipation Factor	C<1µF	≤0.005 10KHz
	1µF<C≤10µF	≤0.008 1KHz
	C>10µF	≤0.010 1KHz

**SIZE TABLE (mm)**

VDC		400VDC				VDC		400VDC			
Mfd		L	D	d	LL	Mfd		L	D	d	LL
104	0.1	18	7	0.8	38	515	5.1	36	19	1	38
124	0.12	18	7	0.8	38	545	5.4	36	20	1	38
154	0.15	19	8	0.8	38	565	5.6	36	21	1	38
184	0.18	19	8	0.8	38	625	6.2	36	21	1	38
224	0.22	19	8	0.8	38	685	6.8	36	24	1	38
274	0.27	19	9	0.6	38	755	7.5	36	23	1	38
304	0.3	19	9	0.8	38	825	8.2	36	24	1	38
334	0.33	25	9	0.8	38	915	9.1	36	25	1	38
394	0.39	25	9	0.8	38	106	10.0	36	26	1	38
434	0.43	25	10	0.8	38	126	12.0	44	26	1	38
474	0.47	25	10	0.8	38	156	15.0	44	29	1	38
544	0.54	25	10	0.8	38	166	16.0	44	29	1	38
564	0.56	25	11	1	38	186	18.0	44	31	1	38
684	0.68	25	11	1	38	206	20.0	44	31	1	38
824	0.82	25	12	1	38	226	22.0	44	34	1	38
105	1.0	31	11	1	38	256	25.0	58	32	1	38
115	1.1	31	12	1	38	276	27.0	58	32	1	38
125	1.2	31	12	1	38	306	30.0	58	35	1	38
155	1.5	31	14	1	38	336	33.0	58	36	1	38
165	1.6	26	14	1	38	366	36.0	58	38	1	38
185	1.8	26	15	1	38	396	39.0	58	39	1	38
205	2.0	31	16	1	38	476	47.0	58	44	1	38
225	2.2	36	15	1	38	516	51.0	58	44	1	38
245	2.4	35	15	1	38	566	56.0	58	46	1	38
275	2.7	36	17	1	38	686	68.0	58	50	1	38
305	3.0	36	18	1	38	826	82.0	58	54	1	38
335	3.3	36	18	1	38	107	100.0	58	59	1	38
365	3.6	36	16	1	38	127	120.0	112	42	1	38
395	3.9	36	17	1	38	157	150.0	112	45	1	38
415	4.1	36	17	1	38	227	220.0	112	57	1	38
435	4.3	36	17	1	38	277	270.0	112	62	1	38
455	4.5	36	18	1	38	307	300.0	112	69	1	38
475	4.7	36	18	1	38	100V 250V 630V are Available on Request					

**Note: Other Values are available on request. WEET is capable of doing custom service for you.**



**WEE Technology Company Limited**  
ROOM 1405, 14/F, LUCKY CENTRE,  
171 WANCHAI ROAD,  
WANCHAI, HONG KONG  
[www.musicaps.com](http://www.musicaps.com)  
[sales@musicaps.com](mailto:sales@musicaps.com)

All details in this data sheet are subject to change without notice.  
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.

